
Partnership. With Guarantee.

# Lubricator 3/8"
# Type L-38-PE







| | |
|---|---|
| Design type | Fog lubricator with protective guard |
| Connection | G3/8" according to ISO228/1 |
| Materials | Housing Acetal resin (POM), Threaded connections Brass, Condensate reservoir Polyamide, Protective cage PE, Seals NBR |
| Function | Enrichment of compressed air with oil |
| Mounting type | Installation in piping system or Wall mounting |
| Mounting position | vertical, Oil reservoir downward |
| Medium | Compressed air |
| Medium temperature | +5...+50°C |
| Ambient temperature | +5...+50°C |
| Inlet pressure | max. 12,5bar |
| Volume Oil reservoir | 68cm³ |
| Oil metering | 1-2 Drops per minute, at flow through the unit |
| recommended oil | after ISO VG 32, STASTO pneumatic oil HP32A |
| Flow direction | is marked by an arrow |



+43 512 52076
austria@stasto.eu
© STASTO Automation KG


## Dimensions

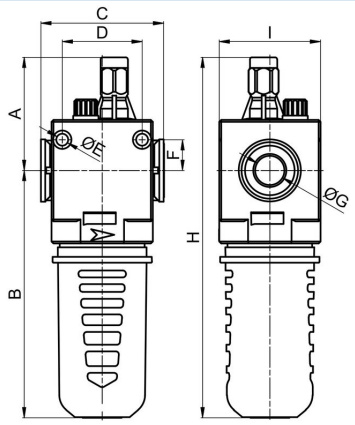


Weight 0,23kg

| Connection G | A | B | C | D | E | F | H | I | Type |
|---|---|---|---|---|---|---|---|---|---|
| G3/8" | 58 | 127 | 63 | 41 | 6 | 15,5 | 185 | 52 | L-38-PE |

## Flow diagram

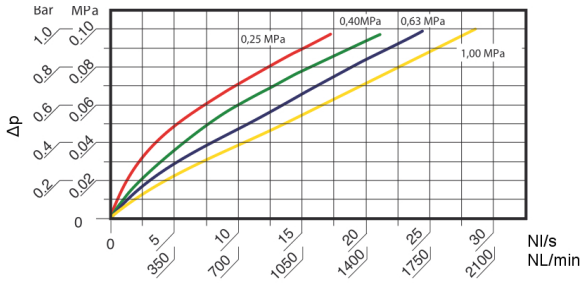


The diagram shows various inlet pressures up to max. 1bar pressure drop

Illustrations non-binding
Design, dimensional and material changes reserved




+43 512 52076
austria@stasto.eu
© STASTO Automation KG