
Partnership. With Guarantee.

Multi-coupling
Series C0MC



Design type	Multi-coupling, shut-off on both sides
Connection	Push-in fittings 6mm or rather 8mm
Materials	Housing glass fiber reinforced high-performance plastic, Seals NBR, Steel circlips, Push-in fittings brass nickel-plated
recommended Hose materials	Polyamide (PA), Polyurethane (CPU/PU), Polyethylene (PE)
Medium	Compressed air, neutral gases
Medium temperature	-20...+70°C
max. operating pressure	7bar

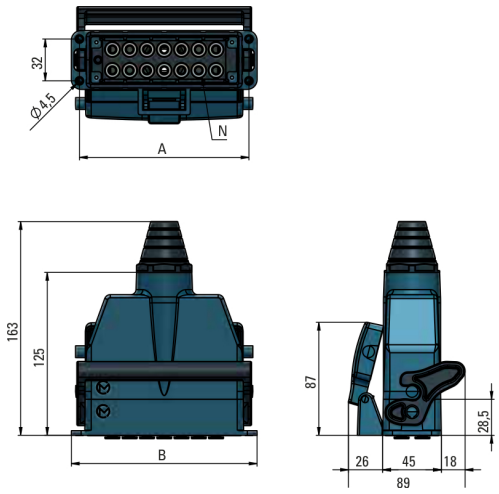

Hose diameter [mm]	N Number of couplings	A	B	Weight [g]	Type
6	6	82,5	95,5	645	C0MC-PI6X06-N
8	4	82,5	95,5	594	C0MC-PI4X08-N

Illustrations non-binding
Design, dimensional and material changes reserved

Version 11
138578 / Generated 2026/41 EN
MADE IN EUROPE

+43 512 52076
austria@stasto.eu
© STASTO Automation KG