


Compressed air nozzles - Blow gun




Standard nozzle, Aluminium

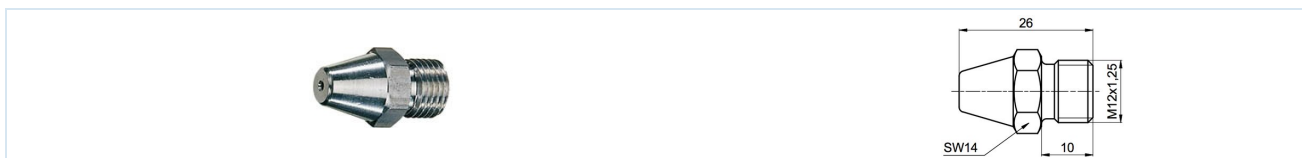


Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [l/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	1,4	120	82	S-26-SN

Cushioning nozzle, Aluminium, Sintered bronze

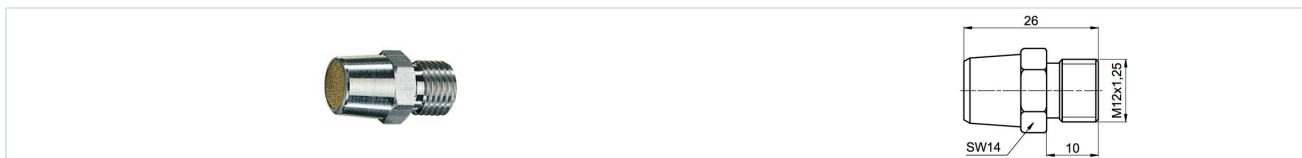

Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [l/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	1,1	318	65	MN-M12x1,25


Nozzle with protective shield, Aluminium, Polyethylene

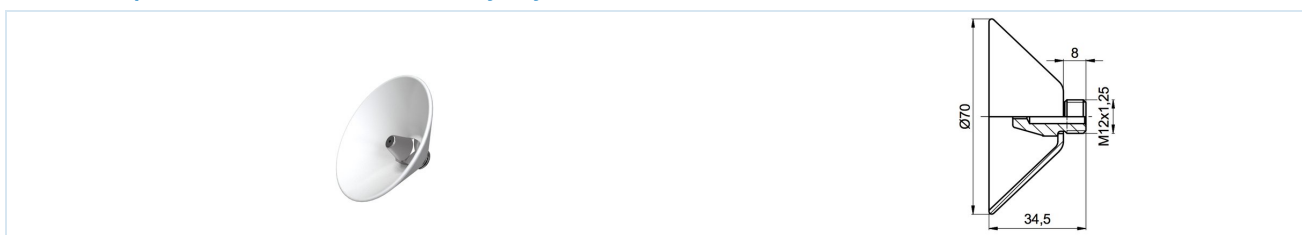

Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [l/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	1,4	120	82	S-26-SNPS




Full jet nozzle, Aluminium

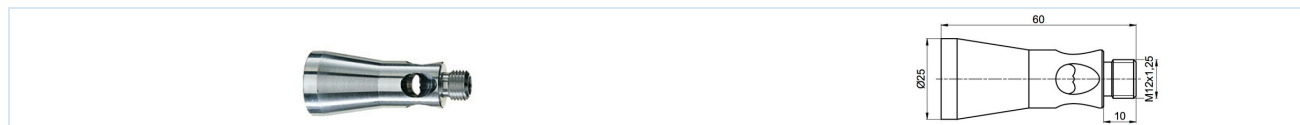


Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [Nl/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	3,1	336	93	S-26-VN

Safety and noise silencer nozzle, Zinc die casting

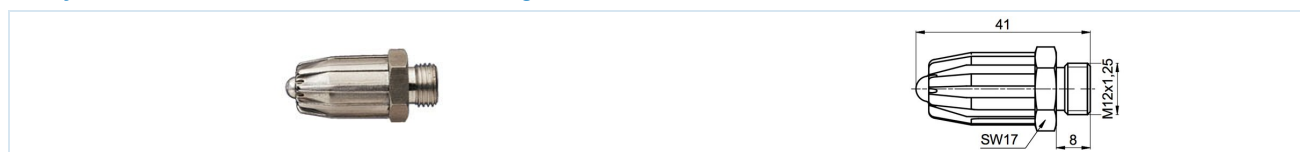


Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [Nl/min] >	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	3	300	77	S-26-SMN

Air jacket nozzle, Aluminium

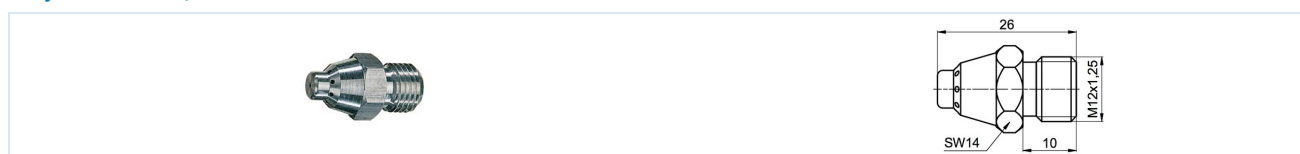


Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [Nl/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	2	426	82	S-26-AJN

Low-noise fine blasting nozzle, Nickel-plated steel, Brass

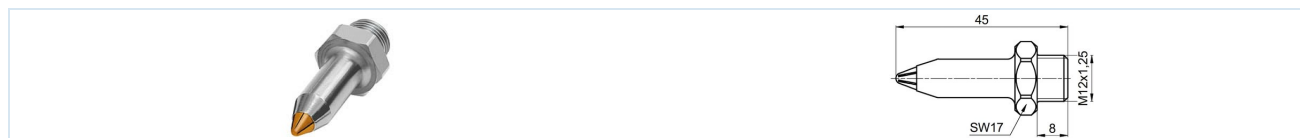

Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [Nl/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	3,8	350	78,5	S-26-FJN


Low-noise round nozzle, Aluminium

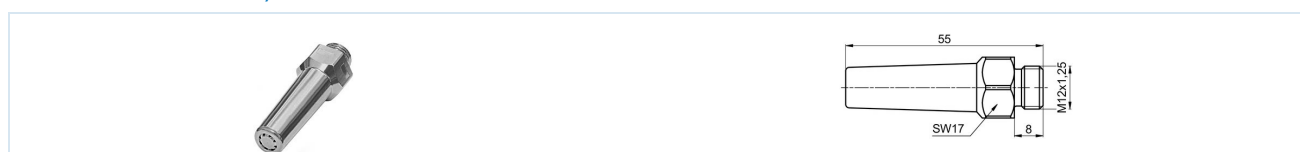

Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [Nl/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	4	650	83	S-26-RN-1




Low-noise round nozzle, Aluminium

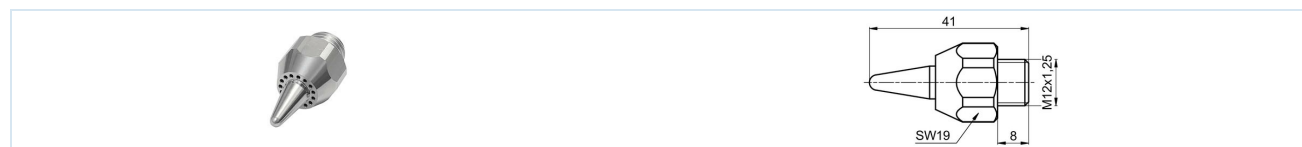


Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [l/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	10,5	1200	88	S-26-RN-2

Low-noise round nozzle, Aluminium

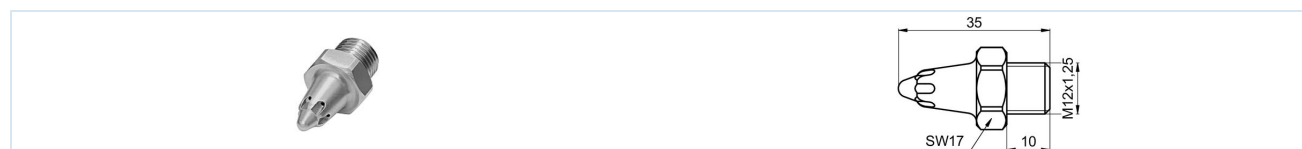


Connection	Blowing force at 100 mm distance at 6 bar (N) [N]	Air consumption at 6 bar [l/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	4,3	370	83	S-26-RN-3

Low-noise round nozzle, Aluminium

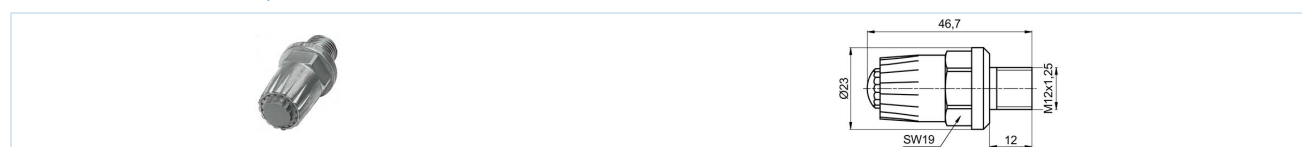


Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [l/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	7,9	1030	85	S-26-RN-4

Low-noise flat nozzle, Nickel-plated brass

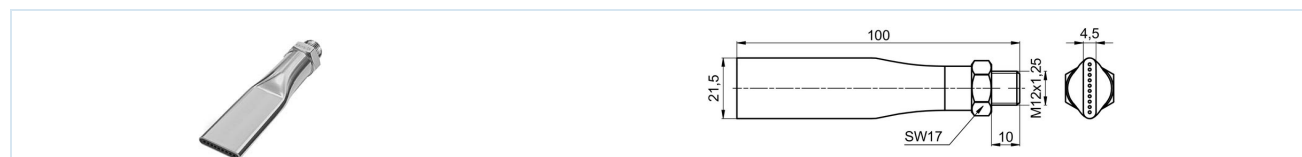

Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [l/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	8,2	930	86	S-26-FN-21,5


Low-noise flat nozzle, Nickel-plated brass

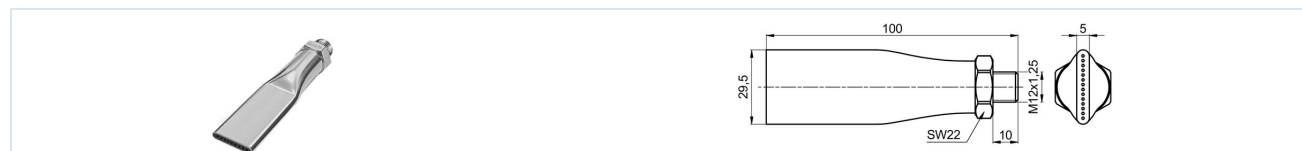

Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [l/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	11,5	1080	90	S-26-FN-29



Low-noise flat nozzle, Nickel-plated brass

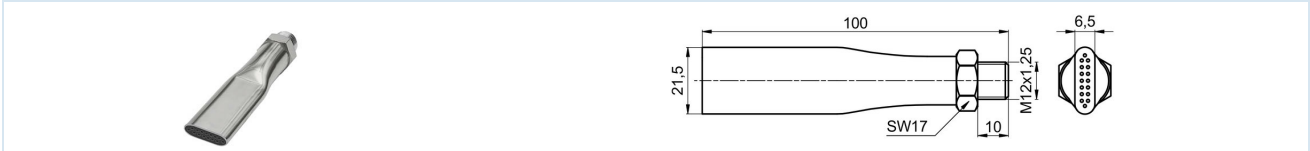

Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [l/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	13,2	1300	92	S-26-FN-21

Straight extension nozzle, 160mm



Connection	Blowing force at 100 mm distance at 6 bar [N]	Air consumption at 6 bar [l/min]	Noise at 1 m distance at 6 bar [dB(A)]	Type
M12x1,25	-	-	-	XNS160

Illustrations non-binding Design, dimensional and material changes reserved

Pneumatics / Compressed air safety - shut-off, blow-off, noise reduction / Standard air-nozzle 1,5mm / [S-26-SN] Standard air-nozzle 1,5mm 1,4-120-82