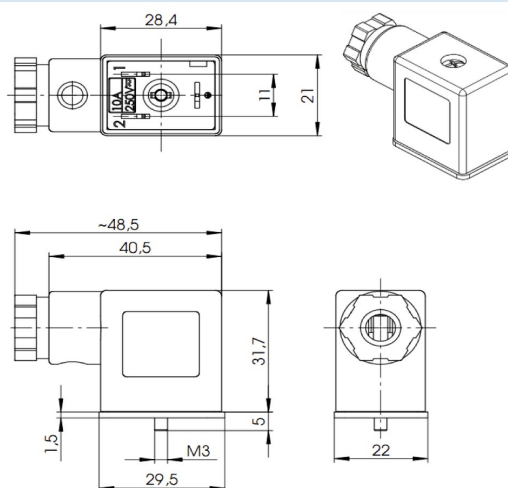


Connector





Design type	connector according to industrial form B, Connector width 22mm
Ambient temperature	-25...+90°C
Cable gland	M16x1,5, Cable diameter 6-8 mm
Connectable cable cross-section	0,5...1,5mm ²
Degree of protection	IP65 according to EN 60529
Scope of delivery	incl. mounting screw and seal NBR

Dimensions



Circuit variants

Circuit diagram	Description
	without wiring
	bipolar LED and varistor

Description	Voltage	Operating current max.	Type
connector	0...250VAC/DC	10A	C002-31-6
connector with varistor and bipolar yellow LED	230VAC/DC	1,5A	C002-31-LV-1
connector with varistor and bipolar yellow LED	24VAC/DC	1,5A	C002-31-LV-2

Illustrations non-binding
Design, dimensional and material changes reserved

[Pneumatics](#) / [Way-valves - electrically / pneumatically](#) / [Coils and connectors](#) / [Connector Type C002](#)

