Partnership. With Guarantee.

# Way valves - mechanically actuated 1/8" up to 1/4" Series VC


VCMS32 . M .


VCMS52M1 .


VCMS52S1 .


VCLR32.M8


VCLR52M18



VCLR52018




VCLL32.M8


VCLL52M18

| | |
|---|---|
| Design type | Slide valve, mechanically actuated |
| Connection | G1/8"...G1/4" according to ISO228/1 |
| Nominal size | G1/8" DN 6mm, G1/4" DN 8mm |
| Flow rate | G1/8" 650Nl/min, G1/4" 1080Nl/min |
| Pressure range | 0...10bar |
| Materials | Body Nickel-plated aluminium, Slide valve Stainless steel, Seals NBR |
| Mounting type | Through bores in the valve body |
| Mounting position | any |
| Medium | filtered and lubricated or non-lubricated compressed air |
| Medium temperature | 0...+40°C |
| Ambient temperature | -10...+50°C |
| Note | CAD files are available in the STASTO Store at www.stasto.eu |

## VCMS32 . M8 3/2-way valve G1/8" Cam/spring







| | Function | F min. | F max. | Type |
|---|---|---|---|---|
|  | NC | 20N | 40N | VCMS326M8 |
|  | NO | 20N | 40N | VCMS329M8 |





+43 512 52076
austria@stasto.eu
© STASTO Automation KG



## VCMS32 . M4  3/2-way valve G1/4" Cam/spring

| | | Function | F min. | F max. | Type |
|---|---|---|---|---|---|
|  |  | NC | 40N | 60N | VCMS326M4 |
| |  | NO | 40N | 60N | VCMS329M4 |



## VCMS52M18  5/2-way valve G1/8" Cam/spring

| | | F min. | F max. | Type |
|---|---|---|---|---|
|  |  | 20N | 40N | VCMS52M18 |

## VCMS52M14  5/2-way valve G1/4" Cam/spring

| | | F min. | F max. | Type |
|---|---|---|---|---|
|  |  | 40N | 60N | VCMS52M14 |

## VCMS52S18  5/2-way valve G1/8" Cam/cam



| | | Type |
|---|---|---|
|  |  | VCMS52S18 |






+43 512 52076
austria@stasto.eu


© STASTO Automation KG



## VCMS52S14 5/2-way valve G1/4" Cam/cam

| | | Type |
|---|---|---|
|  |  | VCMS52S14 |



## VCLR32 . M8 3/2-way valve G1/8" Roller/spring

| | | Function | F min. | F max. | Type |
|---|---|---|---|---|---|
|  |  | NC | 10N | 20N | VCLR326M8 |
| |  | NO | 10N | 20N | VCLR329M8 |

## VCLR52M18 5/2-way valve G1/8" Roller/spring

| | | F min. | F max. | Type |
|---|---|---|---|---|
|  |  | 10N | 20N | VCLR52M18 |

## VCLR52018 5/2-way valve G1/8" Roller/roller

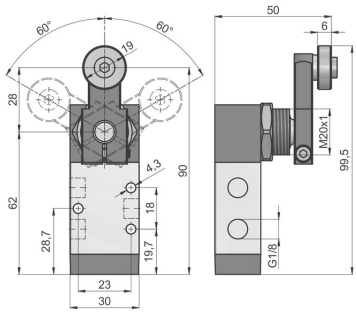

| | | Type |
|---|---|---|
|  |  | VCLR52018 |



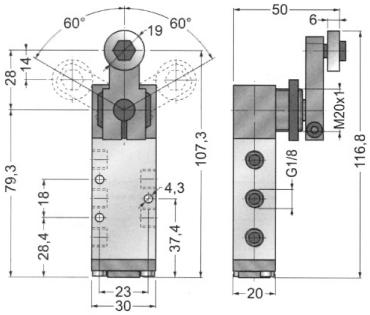

+43 512 52076
austria@stasto.eu


© STASTO Automation KG

## VCLL326M8 3/2-way valve G1/8" Roller/spring

| | | Function | Type |
|---|---|---|---|
|  |  | NC | VCLL326M8 |

## VCLL52M18 5/2-way valve G1/8" Roller/spring

| | | Type |
|---|---|---|
|  |  | VCLL52M18 |

Illustrations non-binding
Design, dimensional and material changes reserved




+43 512 52076
austria@stasto.eu
© STASTO Automation KG